

Coalisator-P

Product information for the product group

ACO Product benefits

- Optional direct suction for retrofitting
- Critical inlet and outlet parts made of non-combustible material according to German Standard DIN 1999-100
- Can be combined with the separately available sludge trap with 150 or 300 litre volumes


- Light liquid separator Class I made of polyethylene
- According to EN 858 and German Standard DIN 1999-100
- With automatic closing
 - Float made of plastic
 - Tared for light liquid with a density up to 0.90 g/cm³
- With supporting cage and coalescence insert with wire mesh
 - All parts removable
- With height-adjustable top section
 - Can be shortened every 45 mm
- Cover
 - Made of cast iron
 - Load class: B 125
- Inlet and outlet fittings made of polyethylene



Item Technical Data 3903.30.10





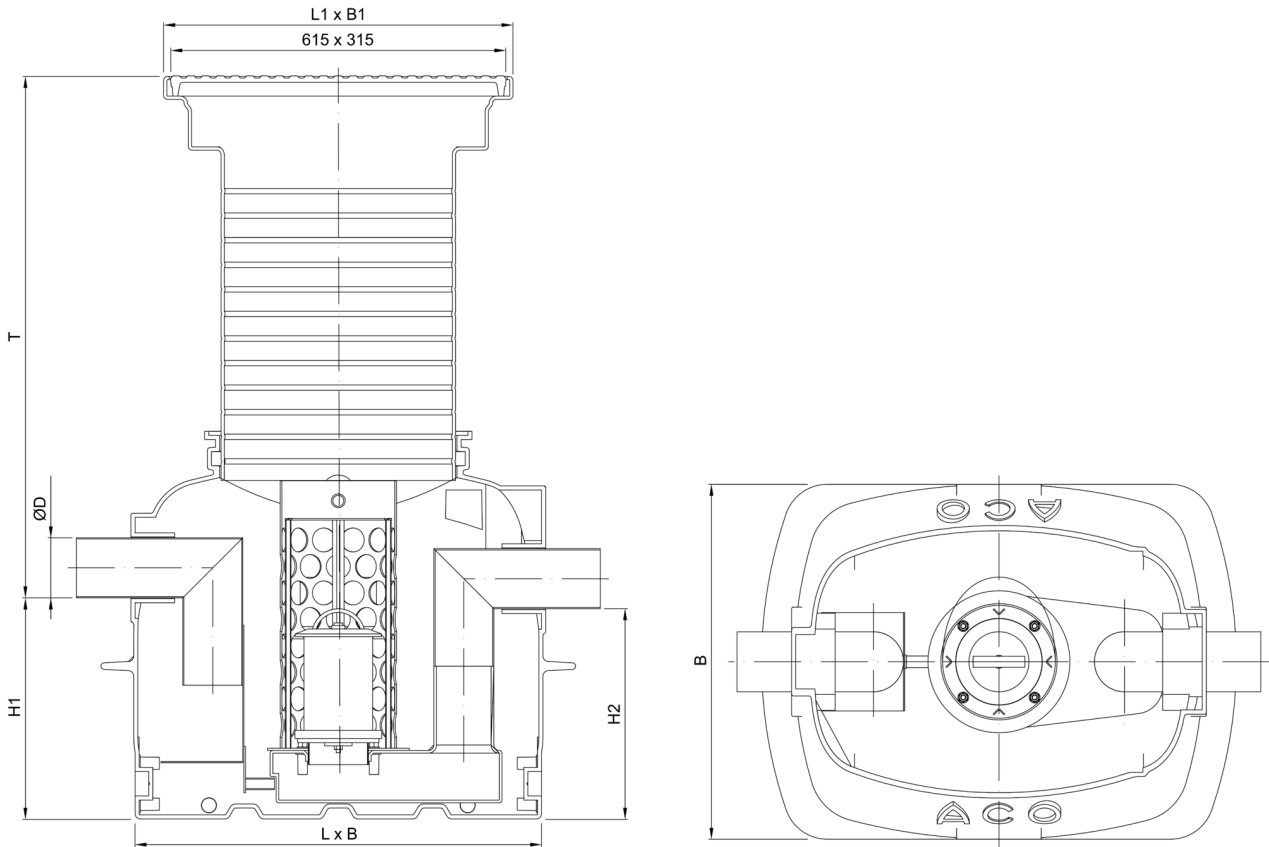


Description	Nominal size	Density [g/cm ³]	Contents		Weight [kg]
			Oil storage [l]	Overall [l]	
<ul style="list-style-type: none"> ■ Inlet depth (T) <ul style="list-style-type: none"> □ 510 – 965 mm 	NS 3	0.9	49	150	74

Dimensions



Description	Nominal size	Inlet/outlet as per DIN EN 877	Dimensions				
			H1 [mm]	H2 [mm]	D [mm]	L x W [mm]	L1 x W1 [mm]
■ Inlet depth (T) □ 510 – 965 mm	NS 3	DN 100	405	385	110	750 x 650	640 x 340

Accessories

	Description	Used with	Weight [kg]	Item number
	Securat idSet 34 alarm system <ul style="list-style-type: none"> ■ For combined or separate monitoring of different fill levels ■ Electrical connection <ul style="list-style-type: none"> <input type="checkbox"/> Voltage: 230 V <input type="checkbox"/> 50-60 Hz <input type="checkbox"/> IP 67 ■ Cable length: 5 m 	<ul style="list-style-type: none"> ■ Coalisator P 	3.0	6751.66.61
	Cable set 20m <ul style="list-style-type: none"> ■ External diameter: 5.0 mm ■ Blue ■ As a connecting cable 	<ul style="list-style-type: none"> ■ Alarm system light oil separator <ul style="list-style-type: none"> <input type="checkbox"/> Securat idOil 20 	0.1	6752.00.03
	Adapter kit <ul style="list-style-type: none"> ■ For on-site suction line DN 65 ■ Incl. Storz-B coupling ■ Incl. blank coupling ■ One adapter set per container is required 	<ul style="list-style-type: none"> ■ Coalisator P 	3.9	3900.00.32
	Connection box <ul style="list-style-type: none"> ■ For evacuation connection DN 80 ■ Made from stainless steel, material grade 304 ■ "On wall" version ■ Door stop <ul style="list-style-type: none"> <input type="checkbox"/> Choice of left or right <input type="checkbox"/> Lockable door ■ Dimensions (width x height x depth): 370 x 330 x 250 mm 	<ul style="list-style-type: none"> ■ Grease separators <ul style="list-style-type: none"> <input type="checkbox"/> LipuMax-P-D/DM/DA <input type="checkbox"/> LipuJet-P-OD/RD/SD/OM/OMP/RM/RMP <input type="checkbox"/> LipuJet-S-OD/RD/SD/OM/OMP/RM/RMP ■ Stach separators FapuMax-P-DA ■ Oil separators Coalisator-P ■ LipuLift-P-D/-DA/-DAP 	10.4	7601.80.22
	In-wall frame <ul style="list-style-type: none"> ■ Stainless steel, material grade 304 ■ Dimensions (width x height x depth): 421 x 381 x 25 mm 	<ul style="list-style-type: none"> ■ Connection box <ul style="list-style-type: none"> <input type="checkbox"/> 7601.80.22 ■ LipuLift-P-D/-DA/-DAP 	1.0	7601.80.23
	Road cap <ul style="list-style-type: none"> ■ Shaft cover tested to DIN EN 124/DIN 1229 ■ Load class: A 15 ■ Frame and cover made of cast iron ■ Diameter: 300 mm ■ Clear width: 250 mm 	<ul style="list-style-type: none"> ■ Grease separator for underground installation <ul style="list-style-type: none"> <input type="checkbox"/> LipuMax-P-D <input type="checkbox"/> LipuMax-P-DM <input type="checkbox"/> LipuMax-P-DA ■ Stach separators FapuMax-P-DA for underground installation ■ Oil separators Coalisator-P 	9.8	5354.00.00
	Sampling shaft DN 100 <ul style="list-style-type: none"> ■ Plastic ■ Load class B125 ■ Clear width: 450 mm ■ Inspection opening: 600 x 300 mm 	<ul style="list-style-type: none"> ■ Coalisator P 	47.5	
	Gradient: 153 mm; Inlet invert: 530 – 985 mm			3301.13.10
	Gradient: 33 mm; Inlet invert: 660 – 1115 mm			3301.13.11

You can find further accessories under → <https://www.buildingdrainage.aco/search/?q=3903.30.10>

